





## RFI/EMC Filters 25 to 200 AMP FCL-11, -110, -14, -140, -112

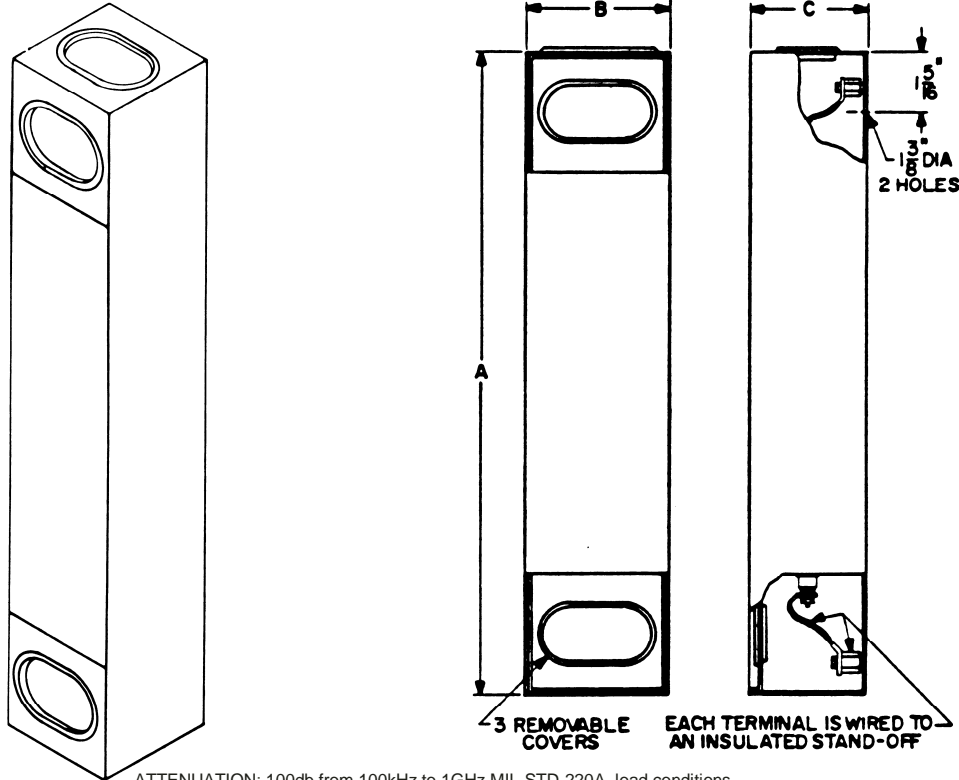

ATTENUATION: 100db from 100kHz to 1GHz MIL-STD-220A, load conditions

Part No	Maximum Current (Amperes)	Maximum Line-to-ground Voltage		Power Line Frequency (Hz)	Dimensions (Inches)			Approx. Wt. (Lbs)
		VAC	VDC		A	B	C	
FCL-11-25 *	25	277	600	0-60	22	4	4 1/4	18
FCL-11-50 *	50	277	600	0-60	22	4	4 1/4	18
FCL-11-100 *	100	277	600	0-60	22	4	4 1/4	18
FCL-11-150 *	150	277	600	0-60	27 1/4	9 1/2	5	45
FCL-11-200 *	200	277	600	0-60	27 1/4	9 1/2	5	45
FCL-110-2S *	25	500	1000	0-60	22	4	4 1/4	18
FCL-110-50	50	500	1000	0-60	22	4	4 1/4	18
FCL-110-100	100	500	1000	0-60	22	4	4 1/4	18
FCL-110-2x30	2x30	115	400	0-60	14 1/4	5	2 3/4	12

Filters are available with built-in discharge resistor and power indicator light. Add suffix DR to part number.  
\*Filters for 400 Hz power available upon request

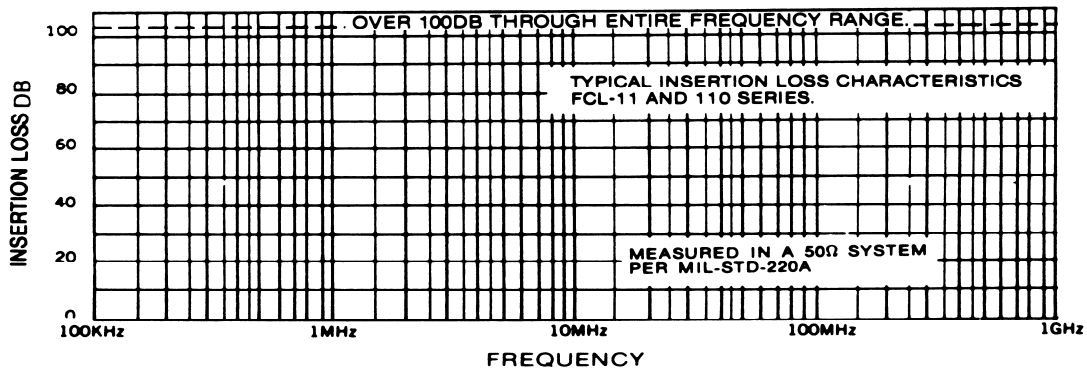




## RFI/EMC Filters 25 to 200 AMP

### FCL-11, -110, -14, -140, -112


Part No	Maximum Current Amperes	Maximum Line-to-ground Voltage		Power Line Frequency (Hz)	Dimensions			Approx. Wt. (Lbs)
		AC	DC		A	B	C	
FCL-14-25	25	277	600	0-60	18 ¼	4	4 ¼	13
FCL-14-50	50	277	600	0-60	18 ¼	4	4 ¼	13
FCL-14-100	100	277	600	0-60	18 ¼	4	4 ¼	13
FCL-14-200	200	277	600	0-60	18 ¼	4	4 ¼	13
FCL-140-25	25	277	600	0-400	18 ¼	4	4 ¼	13
FCL-140-50	50	277	600	0-400	18 ¼	4	4 ¼	13
FCL-140-100	100	277	600	0-400	18 ¼	4	4 ¼	13

Available with built-in filter discharge resistor and power Indicator light. Add suffix DR to part number

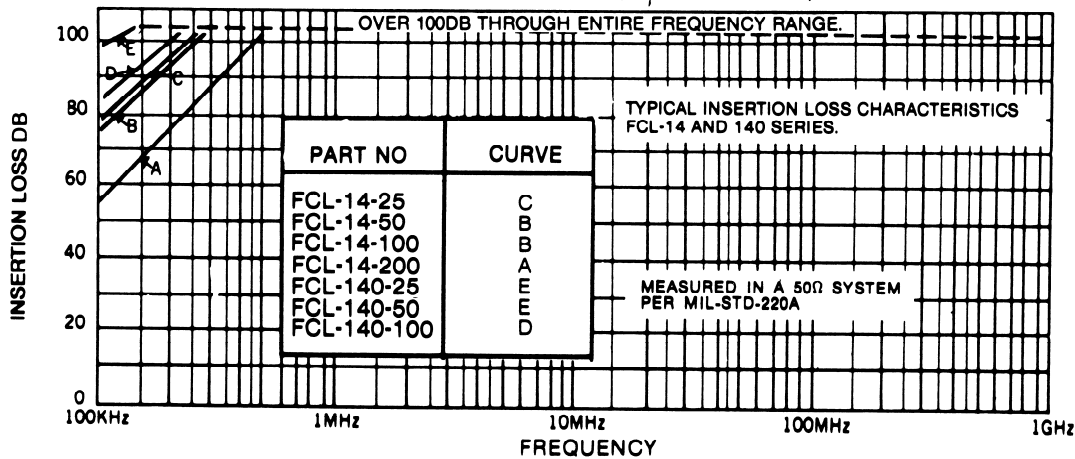

Part No	Maximum Current (Amps)	Maximum Voltage			Power Line Frequency (Hz)	Dimensions			Approx WT (Lbs)
		VAC	VDC	VDC		A	B	C	
FCL-112-25	25	277	480	800	60	34	4 ½	4 ½	20
FCL-112-50	50	277	480	800	60	34	4 ½	4 ¾	25
FCL-112-10	100	277	480	800	60	40	9	5	30
FCL-112-15	150	277	480	800	60	40	15	5 ¼	60
FCL-112-20	200	277	480	800	60	40	15	5 ¼	60


These filters are suitable for use in 3-phase systems up to 480 volts phase-to-phase  
Filters for 400 Hz power available upon request

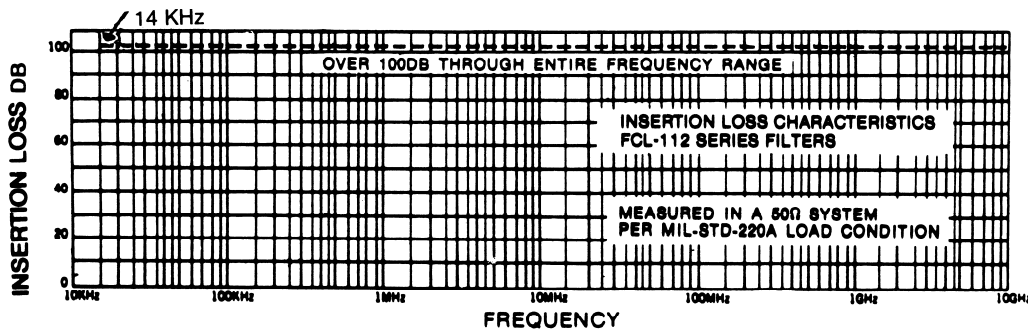



## *RFI/EMC Filters 25 to 200 AMP*

### *FCL-11, -110, -14, -140, -112*

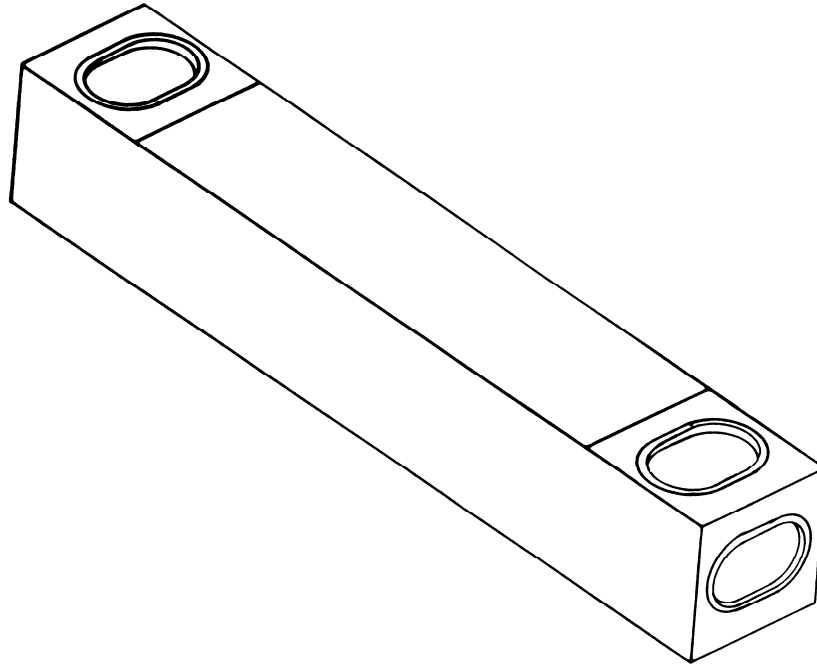

#### **SPECIFICATIONS**

##### GENERAL

The filter herein described shall be designed for filtering of radio frequency interference and to meet the requirements of Military Specifications MIL-F-15733, where applicable. These filters may be used with other electrical devices to enable the devices to meet the requirements of MIL-I-26600, MIL-I-16910, MIL-I-6181, MIL-I-11748, MIL-STD-461, 462, 463, FED-STD-222 and FCC Specification Part 18. Also, DCA specifications and others developed for special equipment and systems applications

##### ELECTRICAL

**CURRENT RATING:** The filters shall be capable of withstanding 140% of rated current for 15 minutes without any deterioration.

**INSERTION LOSS:** The filter shall provide the specified insertion loss of 100 db minimum over its indicated frequency range when measured in accordance with the applicable MIL-STD-220A by a government approved laboratory.

**VOLTAGE:** The filters shall be capable of operating continuously at full- rated voltage and of withstanding an initial voltage test of twice the rated voltage for one minute.

##### MECHANICAL

**CASE:** The filter case shall be made of cold-rolled steel.

**CONSTRUCTION:** Input and output terminals shall be completely enclosed in RF shielded compartments. Covers on the input and output RF shielded compartments shall be friction-fitted. Internal components shall be mounted and fixed to prevent damage when subjected to shock and vibration tests.

**FINISH:** All filter cases shall be made corrosion-resistant with suitable lacquer over primer. All unfinished grounding surfaces shall be protected by suitable plating.

**IMPREGNANT:** The impregnant shall be non-flammable as classified by Underwriters Laboratories.

**TERMINALS:** The terminals shall be made of high temperature alumina ceramic. The ceramic terminal shall have a flexible insulated lead, one end of which is permanently affixed to the terminal. The other end shall be terminated in a permanently affixed lug which shall be mounted on approved flame-retardant insulator.

